

Get List of Locked Out Users and their Clients and Kill the Sessions


Get List of Locked Out Users

Download the [Get-LockedOutUser.ps1](#) script and run it in an administrator powershell prompt:

```
PS C:\Tools> .\Get-LockedOutUser.ps1
```


In the **Security Warning**, click on **Run once** (**Figure 1**):

Figure 1

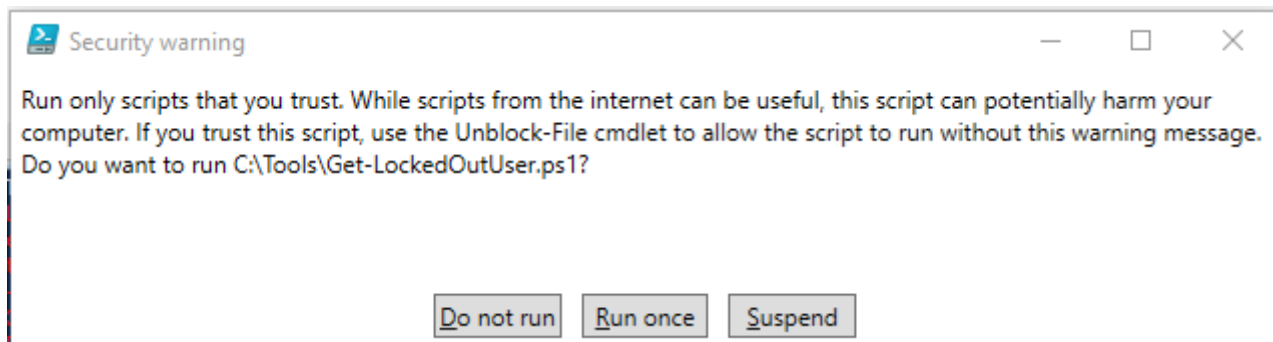

In the **cmdlet Get-Credential at command pipeline** prompt, supply Administrator credentials (**Figure 2**):

Figure 2

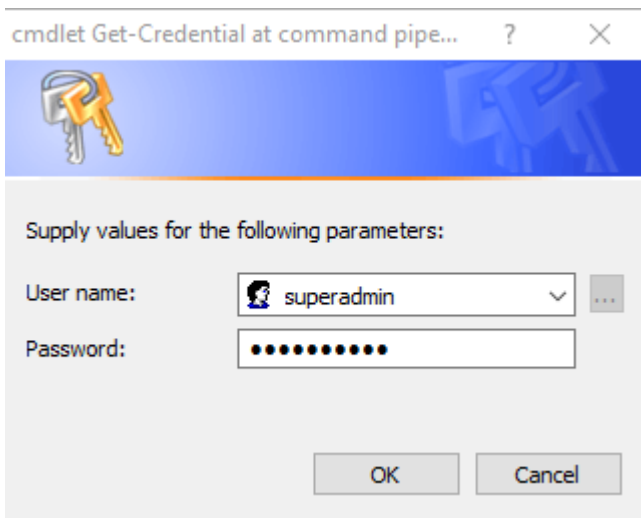

Wait for a bit while it parses the domain controller logs and you should see an output similar to below where the **UserName** field reflects the locked out username and the **ClientName** field reflects the client machine the lockout was generated:

TimeCreated	UserName	ClientName
-----	-----	-----
1/27/2021 9:15:39 AM	user1	wkstation1
1/27/2021 8:20:47 AM	user2	wkstation25
1/27/2021 8:15:27 AM	user3	wkstation11

Kill the Sessions

From a administrator command prompt, get the session ID of the logged in user from the machine name from the powershell output above by using **qwinsta** to query the user session on the client machine you wish to kill the session from:

```
qwinsta /server: wkstation1
```

You should get an output similar to below:

SESSIONNAME	USERNAME	ID	STATE	TYPE	DEVICE
services		0	Disc		
console	user1	1	Disc		
rdp-tcp		65536	Listen		

If we were to kill the session for **user1**, then the session ID would be **1**. We can kill the session by using **rwinsta**:

```
rwinsta 1 /server: wkstation1
```

Revision #3

Created 27 January 2021 14:44:56 by Dino Edwards

Updated 27 January 2021 15:27:21 by Dino Edwards